


Flex Silicone Series, One Part Silicones

Check up to five results to perform an action.

The **FLEX SILICONE SERIES** is designed to meet a wide variety of industrial bonding and sealing applications. While each sealant has unique characteristics that make it particularly suited to certain applications, there are some properties common to all the products because of the silicone compounds used. The **FLEX SILICONE SERIES** is extremely versatile and bonds to a wide range of similar and dissimilar materials. All of the **FLEX SILICONE SERIES** are designed to provide good adhesion and sealing properties for many assembly applications. They are used on glass, ceramics, masonry, wood, painted surfaces, metal, and plastics. These products offer maximum flexibility provide a positive seal, and excellent high/low end temperature stability.

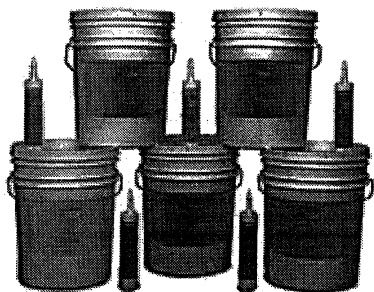

[larger image](#)

Results 1 - 6 of 6

1

<u>Item #</u>	<u>Item Name</u>	<u>Color</u>	<u>Viscosity</u>	<u>Temp. Range</u>	<u>Hardness (Shore A)</u>	<u>Tac Free</u>	<u>MSDS</u>	<u>TDS</u>
<u>FLEX 1100</u>	Acetoxy	Aluminum Black Blue Clear White	Non-Sag Gel	-85 to 450 °F	30	15 min. - 20 min.	<u>MSDS</u>	<u>TDS</u>
<u>FLEX 1200</u>	Neutral	Clear White	Non-Sag Gel	-85 to 450 °F	28	15 min. - 20 min.	<u>MSDS</u>	<u>TDS</u>
<u>FLEX 1300</u>	High Temp	Red	Non-Sag Gel	-85 to 500 °F	30	15 min. - 20 min.	<u>MSDS</u>	N/A
<u>FLEX 1400</u>	Flowable	Clear White	Self Leveling	-85 to 450 °F	35	5 min. - 10 min.	<u>MSDS</u>	N/A
<u>FLEX 1500</u>	Flowable Neutral	White	Non-Sag Gel	-65 to 395 °F	35	60 min. - 90 min.	N/A	N/A
<u>FLEX 1600</u>	Non- Corrosive	Black White	Non-Sag Gel	-65 to 350 °F	37	40 min. - 50 min.	<u>MSDS</u>	<u>TDS</u>