

Very flexible, highly flame retarded, heat-shrinkable tubing
 Very thin wall, rapid installation, excellent flame retardancy,
 low recovery temperature.

V4 is a very flexible, highly flame retarded polyolefin heat-shrinkable tubing with a low recovery temperature. It has been designed as a cost-effective, environmentally friendly choice for many commercial applications. V4 tubing will electrically


insulate and mechanically protect components, terminals and splices. In particular, it is used in applications where space saving is important. Its thin wall allows components to be packed more closely than is possible with standard tubings.

V4 tubing can shrink more than twice as fast as standard tubings, therefore reducing installation time and cost. It has a low recovery temperature (+90°C) which may help prevent the overheating of heat-sensitive components.

Temperature rating

Operating temperature range:	-55°C to +125°C
Minimum shrink temperature:	+70°C
Minimum full recovery temperature:	+90°C

Ordering information

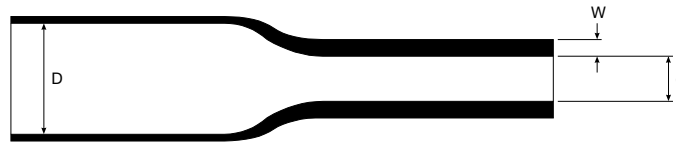

Inside diameter		Wall thickness	Standard package	
D (min)	d (max)	W (nom)		
Expanded as supplied	Recovered after heating	Recovered after heating	Spool quantity	Ordering description
mm	mm	mm	m	
1.17	0.58	0.30	457	V4- ³ / ₆₄ -0
1.6	0.79	0.30	914	V4- ¹ / ₁₆ -0
2.36	1.17	0.30	762	V4- ³ / ₃₂ -0
3.17	1.57	0.30	762	V4- ¹ / ₈ -0
4.74	2.36	0.33	304	V4- ³ / ₁₆ -0
6.35	3.17	0.36	228	V4- ¹ / ₄ -0
9.52	4.74	0.36	152	V4- ³ / ₈ -0
12.7	6.35	0.36	152	V4- ¹ / ₂ -0
19.05	9.52	0.43	76	V4- ³ / ₄ -0
25.4	12.7	0.51	76	V4-1-0

The wall thickness of the tubing will be less than specified if recovery is restricted during shrinkage.

Standard colors

Colour	Black
Code	0

Approvals

UL 224 125°C VW-1 File E35586

CSA-OFT File 31929

Performance

Test	Test method	Test requirement
Tensile strength	ASTM D2671	10.3 MPa
Ultimate elongation	ASTM D2671	200%
Heat Ageing:	UL 224 (168h at 158°C)	Tensile strength: 70% retention Ultimate elongation: 100% (minimum)
Copper contact corrosion:	ASTM D2671 (168h at 158°C)	Ultimate elongation: 100% (minimum)
Dielectric strength:	ASTM D2671	20 MV/m
Flame retardancy:	UL 224	VW-1

For full product performance details consult Raychem Specification RW 3010.

Specifications

Raychem Specification RW 3010.

Material Safety Data Sheet available on request.

Installation instructions available on request.

Raychem and V4 are trademarks of Raychem Interconnect, a division of Tyco Electronics Corporation.

Users should independently evaluate the suitability of the product for their application.

Tyco Electronics Corporation
300 Constitution Drive
Menlo Park, CA 94025-1164
USA
Tel: (800) 926-2425 (US & Canada)
Tel: +1 (650) 361-3860 (All other countries)

Tyco Electronics UK Ltd.
Faraday Road
Dorcan, Swindon, SN3 5HH
United Kingdom
Tel: +44 1793 528171

Tyco Electronics Raychem K.K.
3816 Noborito, Tama-ku
Kawasaki, Kanagawa 214-8533
Japan
Tel: +81 44 900 5102

Tyco Electronics Singapore Pte Ltd.
Asia Pacific Headquarters
26 Ang Mo Kio, Industrial Park 2
Singapore 569507
Tel: +65 4866 151

All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Tyco Electronics Corporation makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Electronics Corporation's only obligations are those in the Standard Terms and Conditions of Sale for these products and in no case will Tyco Electronics Corporation be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Tyco Electronics Corporation's Specifications are subject to change without notice. In addition, Tyco Electronics Corporation reserves the right to make changes in materials or processing without notification to the Buyer which do not affect compliance with any applicable specification.

For more information about this product visit www.tycoelectronics.com and www.raychem.com