


## HT Series

Check up to five results to perform an action.

### High Temperature Cyanoacrylates

Excellent high end temperature resistance. Ideal for applications that have a high degree of temperature cycling and/or extended operation at elevated temperatures.

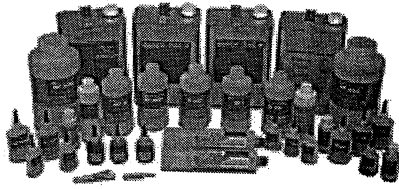

[larger image](#)

Results 1 - 8 of 8

1

<u>Item #</u>	<u>Item Name</u>	<u>Base</u>	<u>Gap Fill (inches)</u>	<u>Viscosity</u>	<u>Strength</u>	<u>Temp. Range</u>	<u>Cure Speed (Fixture)</u>	<u>MSDS</u>	<u>TDS</u>
<u>HT 5</u>	HT Series	Modified Ethyl	0.002	5 cps	2700/4200	-65 to 275 °F	<7 sec.	<u>MSDS</u>	<u>TDS</u>
<u>HT 30</u>	HT Series	Modified Ethyl	0.003	30 cps	2700/4200	-65 to 275 °F	<12 sec.	<u>MSDS</u>	<u>TDS</u>
<u>HT 100</u>	HT Series	Modified Ethyl	0.006	100 cps	2700/4200	-65 to 275 °F	<14 sec.	<u>MSDS</u>	<u>TDS</u>
<u>HT 500</u>	HT Series	Modified Ethyl	0.007	500 cps	2700/4200	-65 to 275 °F	<14 sec.	<u>MSDS</u>	<u>TDS</u>
<u>HT 1000</u>	HT Series	Modified Ethyl	0.008	1000 cps	2700/4200	-65 to 275 °F	<18 sec.	<u>MSDS</u>	<u>TDS</u>
<u>HT 1500</u>	HT Series	Modified Ethyl	0.008	1500 cps	2700/4200	-65 to 275 °F	<18 sec.	<u>MSDS</u>	<u>TDS</u>
<u>HT 2400</u>	HT Series	Modified Ethyl	0.008	2400 cps	2700/4200	-65 to 275 °F	<18 sec.	<u>MSDS</u>	<u>TDS</u>
<u>HT 4000</u>	HT Series	Modified Ethyl	0.008	4000 cps	2700/4200	-65 to 275 °F	<20 sec.	<u>MSDS</u>	<u>TDS</u>