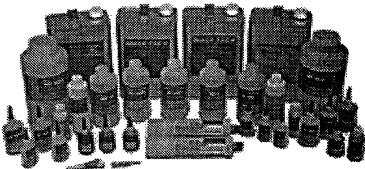


**SI Series**

Check up to five results to perform an action.

**Surface Insensitive Cyanoacrylate Adhesives**

Surface insensitive instant adhesives. Used in applications that require exceptionally fast cure speeds, difficult to bond surfaces, and acidic surfaces. Wood, PVC, substrates that contain plasticizers, certain types of EPDM, etc. Excellent for almost all surfaces.

[larger image](#)

Results 1 - 10 of 10

1

| Item #  | Item Name | Base  | Gap Fill (inches) | Viscosity | Strength  | Temp. Range    | Cure Speed (Fixture) | MSDS                 | TDS                 |
|---------|-----------|-------|-------------------|-----------|-----------|----------------|----------------------|----------------------|---------------------|
| SI 5    | SI Series | Ethyl | 0.002             | 5 cps     | 2800/4200 | -65 to 200 ° F | <5 sec.              | <a href="#">MSDS</a> | <a href="#">TDS</a> |
| SI 30   | SI Series | Ethyl | 0.004             | 30 cps    | 2800/4200 | -65 to 200 ° F | <5 sec.              | <a href="#">MSDS</a> | <a href="#">TDS</a> |
| SI 120  | SI Series | Ethyl | 0.006             | 120 cps   | 2800/4200 | -65 to 200 ° F | <8 sec.              | <a href="#">MSDS</a> | <a href="#">TDS</a> |
| SI 500  | SI Series | Ethyl | 0.007             | 500 cps   | 2800/4200 | -65 to 200 ° F | <8 sec.              | <a href="#">MSDS</a> | <a href="#">TDS</a> |
| SI 1000 | SI Series | Ethyl | 0.008             | 1000 cps  | 2800/4200 | -65 to 200 ° F | <8 sec.              | <a href="#">MSDS</a> | <a href="#">TDS</a> |
| SI 1500 | SI Series | Ethyl | 0.008             | 1500 cps  | 2800/4200 | -65 to 200 ° F | <8 sec.              | <a href="#">MSDS</a> | <a href="#">TDS</a> |
| SI 2000 | SI Series | Ethyl | 0.009             | 2000 cps  | 2800/4200 | -65 to 200 ° F | <8 sec.              | <a href="#">MSDS</a> | <a href="#">TDS</a> |
| SI 3200 | SI Series | Ethyl | 0.009             | 3200 cps  | 2800/4200 | -65 to 200 ° F | <10 sec.             | <a href="#">MSDS</a> | <a href="#">TDS</a> |
| SI 5000 | SI Series | Ethyl | 0.009             | 5000 cps  | 2800/4200 | -65 to 200 ° F | <10 sec.             | <a href="#">MSDS</a> | N/A                 |
| SI GEL  | SI Series | Ethyl | 0.010             | Gel       | 2800/4200 | -65 to 200 ° F | <20 sec.             | <a href="#">MSDS</a> | <a href="#">TDS</a> |